


DIMENSIONS



ORDERING INFORMATION

Model No.	Port Size (NPT)	Output Range	
		psig	kPa
73-30	1/4"	0-30	0-200
73-60	1/4"	0-60	0-400
73-120	1/4"	0-120	0-800

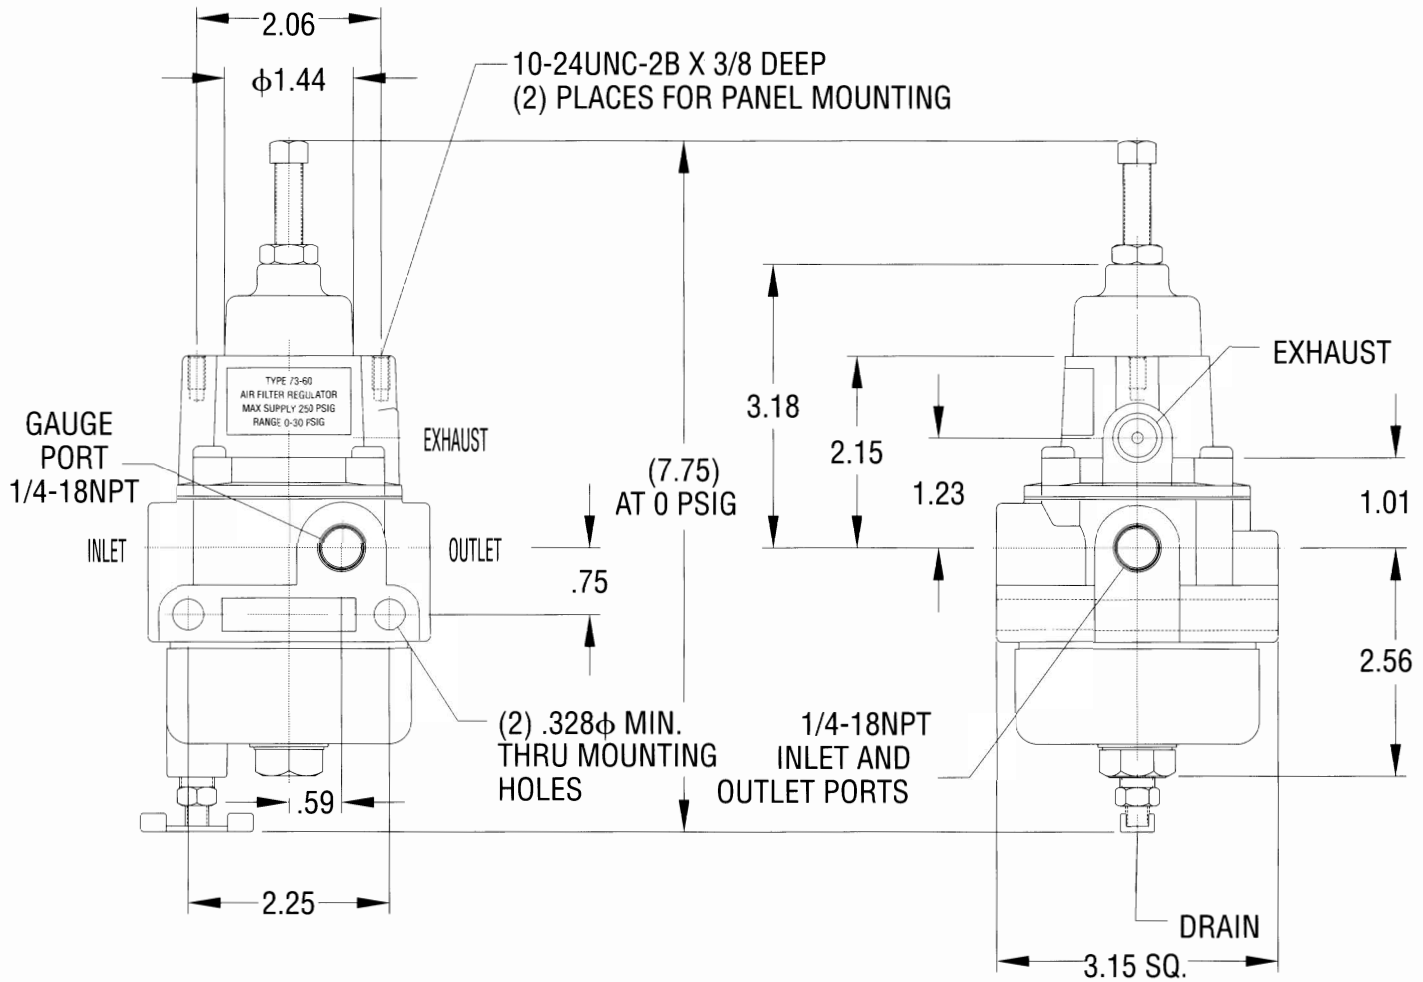

Company Headquarters, Manufacturing Plant & International Sales
P.O. Box 40525 • Houston, TX 77240-0525
11122 West Little York • Houston, TX 77041-5016
(713) 466-3552 • Fax (713) 896-7386
www.norriseal.com

OPTIONS

Add proper suffix to end of model number

- A: Bronze backmounted pressure gauge
- B: SST backmounted pressure gauge
Note: When specified with regulator, the correct range will be supplied.
- H: SST adjusting screw and SST jam lock nut
- I: Knurled plastic knob with SST threaded shank and SST jam lock nut
- L: 1-Bolt flat mounting bracket (diaphragm housing bolt circle mount)
- M: 2-Bolt "L" mounting bracket (yoke or wall mount)
- Q: 5 micron filter
- R: 0.25" NPT tapped exhaust connection
- V: Viton pintle and diaphragm
- W: NACE MR-01-75 compliance