



SERIES 2200 AND 2220 CONTROL VALVES

The Norriseal Series 2200 and 2220 control valves have been the standard for controlling fluids in the oil and gas industry since 1966. The hammer nut entry into the valve body allows quick access for trim inspection. Both Series 2200 and 2220 valves can be furnished with a variety of trims and end connections (see table 7 on page 4 and table 5 on page 3).

The Series 2200 has an open yoke which allows for the mounting of positioners, limit switches and other devices. It is also used in applications that require an exposed stem for accurate travel indication. The yoke allows the valve to be used for higher temperature ranges.

The Series 2220 is the close-coupled or yokeless, space saving version of the Series 2200. This series is ideal for controlling liquids on compressor scrubbers and housed production separators where space is at a premium.



Series 2200



Series 2220

Features

- Patented spherical plug and matching seat gives precision seating alignment
- Two types of throttling trim for precision control: modified percentage and equal percentage
- Hammer nut has extra thread engagement on the valve body to release any pressure within the body that could cause the bonnet/actuator to blow off during disassembly
- Integral flange is provided on the bonnet to secure the hammer nut/bonnet to the valve body, improving safety when used in a corrosive atmosphere
- Carbide, ceramic, alloy 6 and soft seats with high-density materials are available, as well as seal materials for corrosion and high/low temperatures; other materials are available for NACE applications

Contents

- 2 Body Styles
- 2 Valve Dimensions
- 3 Specifications
- 4 Valve Trim
- 6 Actuators
- 7 How to Order
- 7 Model Code




BODY STYLES AND DIMENSIONS

Body Styles


Globe, "T" Styles and Angle Bodies

The 1.00-inch comes in two styles: globe and T-body, allowing fluid to flow straight through the body in a globe pattern or angle flow pattern by repositioning the pipe plug (which comes in the bottom port) and replacing it in the upper port. Norriseal popularized the T-body in 1950 and it still is the most popular style in the industry.

The 2.00-inch body comes in two styles, globe and angle.

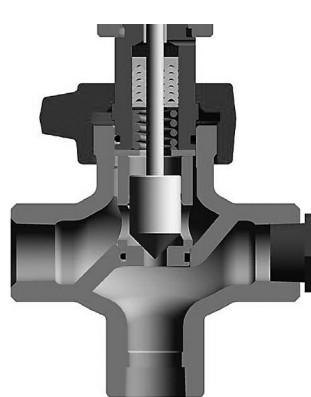

1.00-inch T-body plug for angle flow with quick opening carbide trim.

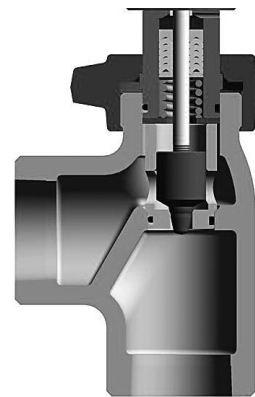


2.00-inch angle body with equal percentage 17-4 PH SST trim.


TABLE 1: VALVE DIMENSIONS

Body Size		Body Type	Face to Face "F"										"G"	
			ANSI Rating											
			150		300		600		900/1500		2500			
inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	inches	mm	
1.00	25	NPT							6.25	159	6.25	159	4.88	124
		RF	7.25	184	7.75	197	8.25	210	9.38	238	11.38	289		
		RTJ	7.75	197	8.25	210								
2.00	50	NPT						7.50	191	N/A		4.88	124	
		RF	10.00	254	10.50	267	11.25	286	12.88	327	N/A			
		RTJ	10.50	267	11.13	283	11.38	289						


* Angle 2.00 "screwed body not shown. "F" dimension = "F"/2.

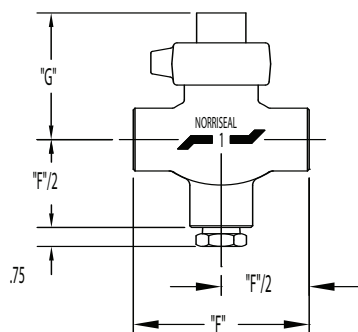


1.00" NPT Body




1.00" Globe Body




1.00" Angle Body

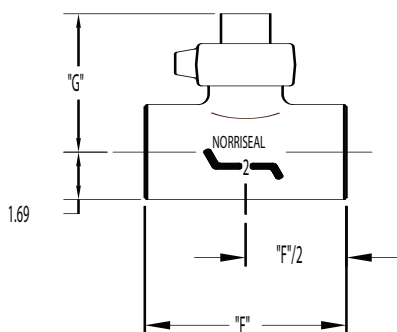

2.00" NPT Body



2.00" Globe Body



2.00" Angle Body



TABLE 2: MATERIALS OF CONSTRUCTION

Valve Component	Material		
	Standard	NACE	Optional
Body	ASTM A216 Gr. WCC	ASTM A216 Gr. WCC	ASTM A351 Gr. CF8M
			ASTM A352 Gr. LCC
			ASTM A217 Gr. WC6
Bonnet	ASTM A696/C	ASTM A696/C	316 SST
Hammer Nut	ASTM A105	ASTM A105	316 SST
Stem	303 SST	316 SST	Monel
			17-4 PH SST
Packing	TFE V Ring	TFE V Ring	Viton/TFE
			Fabric V Ring
Packing Spring	316 SST	Inconel/600	Mp-35-N
Packing Washer	CSti.	316 SST	316L SST
Packing Retainer	Brass	316 SST	316L SST
O-Ring Valve	Nitrile	Viton	Aflas
			EPR
			Kalrez
Diaphragm	Buna/Nylon	Buna/Nylon	Viton/Nylon
O-Ring Diaphragm	Nitrile	Viton	EPDM
Actuator Spring	Steel	Steel	On Application
Adjust. Screw	CSti/PLtd.	CSti/PLtd.	316 SSt
Diaphragm Housing	CSti.	CSti.	CSti.
Diaphragm Plate	CSti.	CSti.	CSti.
Travel Indicator	SST	SST	316L SST

Actuator Pressure Connection Size – 1/4" – 18 NPT Thread

TABLE 3: OPERATING TEMPERATURE*

2200/2220	Std. Mtl.	-20 to 180°F (-29 to 82°C)
2200	Opt. Mtl.	-50 to 400°F (-45 to 204°C)
2220	Opt. Mtl.	-50 to 300°F (-45 to 149°C)

* Optional material built valves can cover high or low temperature ranges, but not necessarily both.

TABLE 4: ACTUATOR

Actuator Number	Maximum W. P.		Size/Eff. Area		Travel	
	psig	bar	sq. ins.	cm. sq.	ins.	mm
9	50	3.4	35	226	0.625	15.9
12	35	2.4	70	452	0.625	15.9

TABLE 5: BODY END CONNECTIONS AND PRESSURE RATINGS*

Body Size		NPT (Scrw'd)		Butt Weld	Socket Weld	ASME Flanged RF and RTJ				Body Style
Inches	mm	psig	bar			150/300	600	900/1500	2500	
1.00	25	3750	259	X	X	X	X	X		Globe/"T"
1.00	25	6250	431	X	X				X	"T"
2.00	50	3750	259	X	X	X	X	X		Globe/Angle

* Pressure ratings are based on temperatures of -20 to 100° F (-29 to 38° C) with standard material. Consult factory for pressure ratings for temperatures other than those shown. (X) indicates end connections available.



VALVE TRIM

TABLE 6: 2200/2220 GLOBE & ANGLE BODY, MODIFIED PERCENTAGE*, EQUAL PERCENTAGE & QUICK OPENING, UNBALANCED, PLUG CONTROL TRIMS

Body Size		Trim Size		Flow Coefficient (CV) Globe Body Valve Opening – Percent of Total Travel									Quick ^ Opening	
				Modified Percentage (Flow Up)									(Flow Down)	
Inches	mm	Inches	mm	10	20	30	40	50	60	70	80	90	100	100
1.00	25	0.25	6.4	.284	.506	.657	.767	.875	.989	1.10	1.20	1.32	1.43	1.68
		0.38	9.5	.311	.621	.942	1.28	1.64	2.07	2.51	2.93	3.35	3.70	3.82
		0.50	12.7	.557	1.11	1.68	2.26	2.92	3.62	4.30	4.98	5.43	5.60	5.60
		0.75	19.1	.752	1.57	2.43	3.42	4.58	6.08	7.93	9.71	10.6	11.0	11.6
		1.00	25.4	.983	2.01	3.40	6.12	8.90	11.7	13.5	14.4	15.1	15.4	15.4
2.00	50	0.25	6.4	.284	.506	.657	.767	.875	.989	1.10	1.20	1.32	1.43	1.68
		0.38	9.5	.311	.621	.942	1.28	1.64	2.07	2.51	2.93	3.35	3.70	3.75
		0.50	12.7	.592	1.17	1.76	2.34	2.95	3.70	4.57	5.50	5.95	6.08	6.08
		0.75	19.1	.882	1.76	2.76	3.82	5.05	6.57	8.49	10.8	12.2	12.9	13.0
		1.00	25.4	1.01	2.02	3.08	4.67	6.96	10.3	13.7	15.4	16.7	17.1	23.0

* Consult factory for equal percentage and micro-groove trim values; ^ Angle body

TABLE 7: PLUG TYPES AND SIZES

Size		Quick Opening	Modified Percentage	Equal Percentage	Micro Groove
Inches	mm				
0.25	6.4	X	X	X	X
0.38	9.4	X	X	X	X
0.50	12.7	X	X	X	X
0.75	19.1	X	X	X	
1.00	25.4	X	X		

Note: (X) indicates sizes available

TABLE 8: PLUG MATERIAL

Standard	Optional
17-4 SST	316 SST
	Carbide
	Ceramic
	Alloy 6
	Teflon

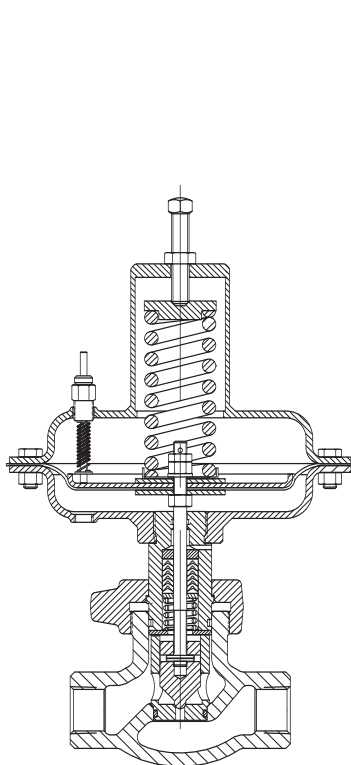


Fig. 9. 1.00" Series 2220 valve with a no. 9 reverse (spring closing) actuator. Throttle trim, flow up.

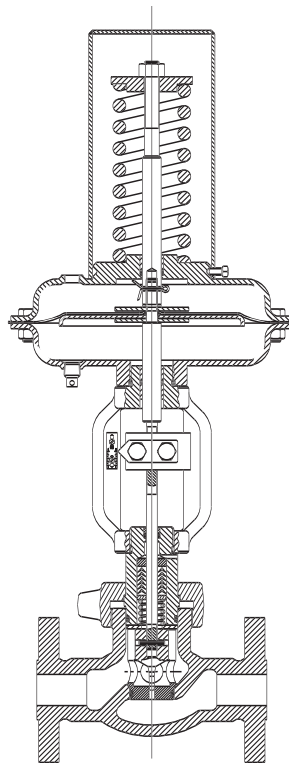


Fig. 10. 1.00" Series 2200 valve with a no. 9 direct (spring opening) actuator. Throttle trim, flow up.

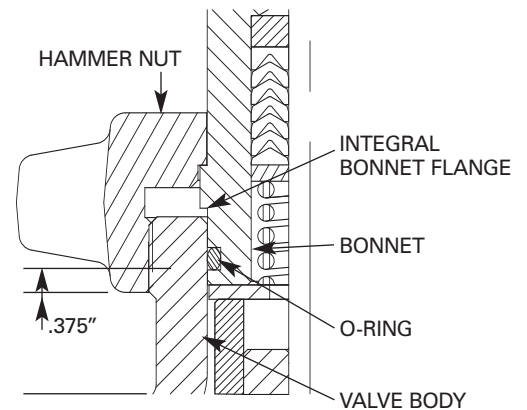


Fig. 11. Hammer Nut/Bonnet Body Engagement



TABLE 9: MAXIMUM DIFFERENTIAL PRESSURE (3-15 PSI)

Trim Size		Actuator Size (1)	Gas Supply Pressure		Flow Under Seat				Flow Over Seat			
					Throttle (2)				Quick Opening			
					Direct		Reverse		Direct		Reverse	
Inches	mm	Number	psig	bar	psig	bar	psig	bar	psig	bar	psig	bar
.25	6.4	9	20	1.4	2610	180	4750	327	6250	431	6250	431
			30	2.0	6250	431	6250	431	6250	431	6250	431
		12	20	1.4	6250	431	6250	431	6250	431	6250	431
			30	2.0	6250	431	6250	431	6250	431	6250	431
.38	9.5	9	20	1.4	1050	72	1975	136	6250	431	6250	431
			30	2.0	4220	291	5150	355	6250	431	6250	431
		12	20	1.4	3695	255	5550	383	6250	431	6250	431
			30	2.0	6250	431	6250	431	6250	431	6250	431
.50	12.7	9	20	1.4	530	36	1050	672	6250	431	6250	431
			30	2.0	2315	160	2850	197	6250	431	6250	431
		12	20	1.4	2015	139	3060	211	6250	431	6250	431
			30	2.0	5580	385	6250	431	6250	431	6250	431
.75	19.1	9	20	1.4	180	12	420	29	2400	166	1700	117
			30	2.0	975	67	1210	83	3460	239	1700	117
		12	20	1.4	840	58	1315	91	4520	312	2975	205
			30	2.0	2415	167	2900	200	6250	431	5090	351
1.00	25.4	9	20	1.4	70	5	205	14	1215	84	780	54
			30	2.0	515	35	650	45	1730	119	780	54
		12	20	1.4	440	30	710	49	2255	155	175	12
			30	2.0	1330	92	1600	110	3290	227	2330	161

1 – Number 9 actuator has a 3-15 psi spring.
 Number 12 actuator has a 3-15 psi spring.
 2 – For flow over seat, consult your sales representative.

TABLE 10: MAXIMUM DIFFERENTIAL PRESSURE (6-30 PSI)

Trim Size		Actuator Size	Gas Supply Pressure		Flow Under Seat				Flow Over Seat			
					Throttle				Quick Opening			
					Direct (1)		Reverse		Direct		Reverse	
Inches	mm	Number	psig	bar	psig	bar	psig	bar	psig	bar	psig	bar
.25	6.4	9	33	2.3			6250	431	6250	431		
		12			6250	431	6250	431	6250	431	6250	431
.38	9.5	9	33	2.3			3300	228	6250	431		
		12			3955	273	5855	404	6250	431	6250	431
.50	12.7	9	33	2.3			1804	124	6250	431		
		12			2165	149	3200	221	6250	431	6250	431
.75	19.1	9	33	2.3			751	52	3165	218		
		12			905	62	1380	95	6250	431	285	20
1.0	25.4	9	33	2.3			393	27	1525	105		
		12			480	33	745	51	3600	248	175	12

1 – For flow over seat, consult your sales representative.
 (See Table 11 for actuator spring description)



ACTUATORS

TABLE 11: SPRING DESCRIPTION

Actuator Number	Throttle	Quick Opening	Range	Table No.
9		AA	3 – 11 psi	9
	NN		3 – 15 psi	9
	HA	HA	6 – 30 psi	10
12	HA	HA	3 – 15 psi	9
	WM	WM	6 – 30 psi	10

TABLE 12: SHUTOFF CLASSIFICATION

Metal Seats	ANSI Class IV (ANSI/FCI 70-2-1998) Leakage less than 0.01% of maximum valve capacity
Soft Seats	ANSI Class VI (ANSI/FCI 70-2-1998) Leakage less than one bubble per minute.

TABLE 13: ACTUATOR DIMENSIONS

Body Size		Actuator Number	A		B								Direct* Spring Cover		Spring Description
			Actuator Diameter		Reverse				Direct						
Inches	mm		Inches	mm	2200		2220		2200		2220		Inches	mm	
1.00	25	9	9.5	241	15.38	391	9.75	248	15.88	403	10.25	260	5.50	140	AA
2.00	50				17.13	435	11.50	292	17.38	441	11.75	298	7.00	1178	NN, HA
1.00	25	12	12.5	318	16.50	419	10.88	276	17.38	441	11.75	298	7.00	1178	HA
2.00	50				20.25	521	14.62	371	20.50	521	14.38	365	10.00	254	WM

*Clearance required for "Direct Actuator" cover removal.

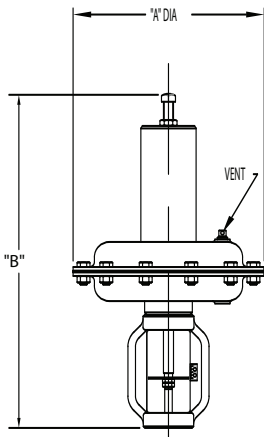


Fig. 12
Reverse Actuator
Series 2200

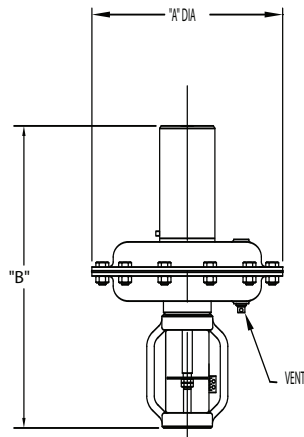


Fig. 13
Direct Actuator
Series 2200




Fig. 14
Reverse Actuator
Series 2220

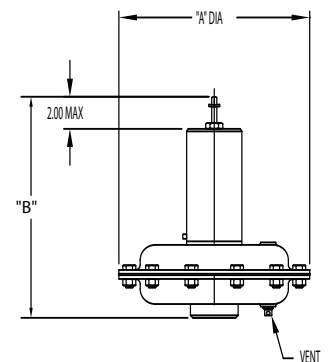


Fig. 15
Direct Actuator
Series 2220



How to Order

1. Select the valve by series number: 2200 (with yoke) or 2220 (close coupled)
2. Select body size
3. Select model number

BODY CONNECTIONS

Size	Code
Screwed Female NPT	S
Flanged Raised Face	RF
Flanged Ring Type Joint	RJ
Flanged Flat Face	FF
Beveled Butt weld	B*
Socket weld	W*

*Schedule Required

BODY SIZE

Size	Code
1.00"	1
2.00"	2

VALVE SERIES

Series	Code
Open Yoke	2200
Close Coupled	2220

SPECIAL COMPONENTS

Body/Bonnet	Code
WCC/A696	-
CF8M/316/CF8M/316/A696	R
WCC/CF8M/316/316 NACE MR0175 2002	N

BODY RATING

ANSI Class	Code
150	02
300	07
600	14
900	21
1500	36
2500	60

ACTUATOR ACTION

Mode	Code
Direct (Fail Open)	B
Reverse (Fail Open)	T
Manual (Handwheel)	M

BODY STYLE

Type	Code
Angle	A
Globe	G
"T"	T

I-2200 S-36TGA-9AA

ACTUATOR SPRINGS

Code	Actuator Number
NN, AA, HA*	9
HA, WM*	12

*See Table 11

ACTUATOR SIZE

Code	Number
"00"	None
9	9
12	12
EC	Electric

PACKING

Code	Material	Load Type	Temp. Rating
-	TFE V-Ring	Non - Adj.	STD. (Table 2)
C	Fabric V-Ring	Non - Adj.	-20° F -29° C
Fugitive Emission Packing*			
L	Viton/TFE	Non - Adj.	0+400° F -18+204° C

*Requires special bonnet and packing plug

SEAL MATERIAL - WETTED

Code	Material
A	Nitrile - Std.
K	Viton - NACE
L	Low Temp. Nitrile
V	Viton

Accessories:

Positioners (Electro-Pneumatic, Pneumatic and Digital), Airlock, Limit Switches, Solenoid Valve, Booster Relay, Filter Regulators, I/P Transducers, Pressure Controllers, Temperature Controllers, etc.

Why you can depend on genuine Norriseal products

- In-house engineering and technical support
- In-depth applications experience
- Award-winning innovation and ongoing product development
- ISO 9001-certified manufacturing
- Over five decades of industry service
- Compliance with all industry standards and specifications
- Responsive service and prompt delivery
- Field support available worldwide

Please contact your Norriseal representative for more details and assistance in specifying the optimal solution for your application.



Engineered Performance

11122 West Little York • Houston, Texas 77041

Tel: 713-466-3552 • Fax: 713-896-7386

www.norriseal.com